



INSTALLATION, OPERATION & MAINTENANCE INSTRUCTIONS

1455 Kleppe Lane ♦ Sparks, NV 89431-6467 ♦ (775) 359-4712 ♦ Fax (775) 359-7424
E-mail: haws@hawsco.com ♦ website: www.hawsco.com

No. 0510002247 (1)

Model 1011P/1011MSP Drinking Fountain

NOTE TO INSTALLER: Please leave this information with the Maintenance Department.

LIMITED WARRANTY



HAWS warrants that all of its products are guaranteed against defective material or poor workmanship for a period of **one year from the date of shipment**. The foregoing notwithstanding, *HAWS* warrants certain specific products or components thereof for an adjusted period. A list of these excepted products and components and a description of their respective warranty terms may be found here: www.hawsco.com/warranty. *HAWS'* liability under this warranty shall be discharged by furnishing without charge F.O.B. *HAWS* factory any goods, or part thereof, which shall appear to the Company upon inspection to be of defective material or not of first-class workmanship, provided that a claim is made in writing to Company within a reasonable period after receipt of the product. Where claims for defects are made, the defective part or parts shall be delivered to the Company, prepaid, for inspection. *HAWS* shall not be liable for the cost of repairs, alterations or replacements, or the labor required to implement them, or for any expense connected therewith made by the owner or owner's agents, except upon written authority from *HAWS*. *HAWS* shall not be liable for any damages caused by defective materials or poor workmanship, except for replacements, as provided above. Buyer agrees that *HAWS* has made no other warranties either express or implied in addition to those above stated, except that of title with respect to any of the products or equipment sold hereunder and that *HAWS* shall not be liable for general, special, incidental, or consequential damages claimed to arise under the contract of sale.

Equipment manufactured by *HAWS* is warranted to function if installation and maintenance instructions provided are adhered to. The units also must be used for the purpose for which they were intended. Any *HAWS* emergency equipment is intended to supplement first-aid treatment. Due to widely varying conditions, *HAWS* cannot guarantee that the use of this emergency equipment will prevent serious injury or the aggravation of existing or prior injuries.



EXCEPT AS EXPRESSLY STATED HEREIN, HAWS HEREBY DISCLAIMS ALL WARRANTIES, WHETHER EXPRESS OR IMPLIED, ARISING BY LAW OR OTHERWISE, INCLUDING WITHOUT LIMITATION, ANY IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THIS WARRANTY MAY NOT BE MODIFIED OR EXTENDED WITHOUT THE WRITTEN CONSENT OF HAWS. REMEDIES AND REPLACEMENTS STATED HEREIN ARE EXCLUSIVE. IN NO EVENT SHALL HAWS BE LIABLE FOR ANY SPECIAL, PUNITIVE, CONSEQUENTIAL, OR INCIDENTAL DAMAGES TO ANY PERSON INCLUDING BUT NOT LIMITED TO DAMAGES FOR LOSS OF USE OR PROFITS, SUBSTITUTE PRODUCTS OR COSTS, PROPERTY DAMAGE, OR OTHER MONETARY LOSS.

MODELS

Model 1011P

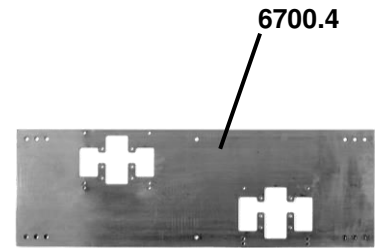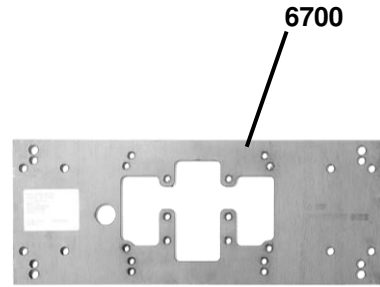

Model 1011MSP

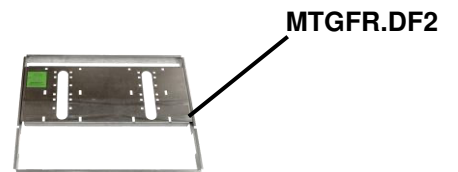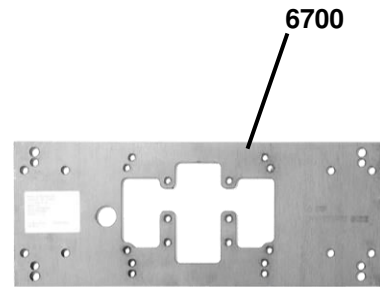

SHOULD YOU EXPERIENCE DIFFICULTY WITH THE INSTALLATION OF THIS MODEL PLEASE CALL:

TECHNICAL SUPPORT: 1-800-766-5612

FOR CUSTOMER SERVICE: 1-888-640-4297

RECOMMENDED TOOLS: Hack saw, pipe joint sealant, screwdriver, level, 12" adjustable wrench, 10" pipe wrench, 5/32 " hex key wrench, 9/16", 1/2", 7/16" socket wrench or open end wrench, tubing cutter.

LOCATION OF UNIT: The Model 1011P/1011MSP is a wheelchair accessible drinking facility. The height dimensions shown, meet current ADA requirements. When installing this unit, local, state or federal codes should be adhered to. If height other than shown is required, then dimensions must be adjusted accordingly.

SUPPLY LINE: The minimum recommended line size is 1/2"IPS with 40-90 psi flowing pressure. Where sediment or mineral content is a problem, an inlet filter is recommended.

PLUMBING CONNECTIONS: Inlet is 3/8" O.D. tube. Waste outlet is 1-1/4" O.D. tube.

MAINTENANCE: Periodically clean the strainer. Refer to 5874 Series Valve Manual for more information.

PARTS LIST

FOR MODEL 1011P

FOR MODEL 1011P	QUANTITY	ITEMS INCLUDED
1011	1	Vandal Resistant Dual Drinking Fountain
1920	1	Vandal Resistant Push Button Bottle Filler
BP32	1	Back Panel
6700.4	1	Mounting Plate
6700	1	Mounting Plate

FOR MODELS 1011MSP

FOR MODELS 1011MSP	QUANTITY	ITEMS INCLUDED
1011MS	1	Vandal Resistant Dual Drinking Fountain With Access Panel
1920	1	Vandal Resistant Push Button Bottle Filler
BP32	1	Back Panel
MTGFR.DF2	1	Mounting Frame
6700	1	Mounting Plate

1311P/1311S INSTALLATION PROCEDURE

NOTE: The product manuals included in this bundle contain images and directions for various models and configurations. Please note that not all images and configurations are relevant to this bundle. This bundle provides all necessary parts for installation.

Use this manual as a reference for setting up this bundle. Follow the steps below to complete installation.

STEP 1: Install Mounting Frame (MTGFR.DF2) & Mounting Plates (6700 & 6700.4)

Model 1011P: Provide a wall opening for the 6700 and 6700.4 mounting plates, using the installation instructions located in the 6700 and 6700.4 product boxes. The 6700.4 mounting plate should be installed below the 6700 mounting plate.

Model 1011MSP: Provide a wall opening for the 6700 mounting plate and the MTGFR.DF2 mounting frame, using the installation instructions located in the 6700 and MTGFR.DF2 product boxes. The 6700 should be installed above the MTGFR.DF2.

STEP 2: Install Bottle Filler Back Panel (BP32) & Bottle Filler (1920)

Install the BP32 and 1920 bottle filler onto the higher 6700 mounting plate, using the installation instructions located in the BP32 and 1920 product boxes.

STEP 3: Install Drinking Fountain (1011 or 1011MS) with Included Back Panel

Model 1011P: Attach the 1011 drinking fountain, with its included back panel, to the 6700.4 plate, using the installation instructions located in the 1011 product box.

Model 1011MSP: Attach the 1011MS drinking fountain, with its included back panel, to the MTGFR.DF2 frame, using the installation instructions located in the 1011MS product box.

Refer to the troubleshooting guide within the appropriate product manual for any issues.