

model 2000HS

Haws RIVIVE™ Hydration Station™ Recessed Bottle Filler

FEATURES & BENEFITS

FIELD CONFIGURABLE FILTERING

3000 gallon (11356 L) capacity, Electronic Lifecycle Control filter cartridge. Choose between filtered or non-filtered water with the included interchangeable 3000-gallon filter and 5y rated strainer.

AUTO PURGE

Auto purge feature automatically cycles once every 24 hours, if no use, to assure a fresh water supply as well as trap integrity.

VANDAL RESISTANT

Vandal-resistant sensor resists scratching and water droplet fowling, and is separated from display for maintenance, and sensor features a 20-second timeout function which prevents unwanted use.

LED DISPLAY

Display menu which shows sensor range adjustment, factory reset, software/firmware version readout and error readout, along with bottle counter showing number of bottles saved.

MOUNTING

Heavy-duty 16-gauge galvanized steel mounting frame provides a secure and quick installation, and allows enough access room for water stop, electrical junction box, filter and drain connections.

OPTIONS

 Filter Replacement: Model 6428-C pack of twelve 3000-gallon (11356 L) replacement filters.

For more information, visit www.hawsco.com or call (888) 640-4297.



SPECIFICATIONS

Model 2000HS RIVIVE™ Hydration Station™ motion-activated bottle filling station with architectural roots is recessed wall-mount wheel chair accessible, constructed of heavy duty, Type 304 Stainless Steel with a satin finish, and stainless steel satin finish back panel The unit features an electric sensor for touch-free hygienic operation and a 20-second timeout preventing unwanted use, auto-purge after 24 of non-use, laminar flow to prevent splashing, a 1.1 gpm (4.2 L) flow rate for quick fill-up, and a 3000-gallon (11356 L) carbon block filter. Display menu shows sensor range adjustment, factory reset, software/firmware version readout and error readout. The mounting frame is of heavy gauge, galvanized steel, which provides enough access room for water stop, electrical junction box, filter and drain connections. Field-configurable as either filtered or non-filtered.

APPLICATIONS

Perfect for either public or private indoor settings, this water dispenser is a great fit in areas where aesthetics are important to the overall appeal of the architecture. Specifically, this type of recessed, wall-mounted bottle filling station is ideal for office buildings, airports, schools, manufacturing facilities and municipalities. Model 2000SH meets the Americans with Disabilities Act when mounted at the correct height. Haws manufactures drinking fountains and electric water coolers to be lead-free by all known definitions including NSF/ANSI/CAN 61, Section 9, NSF/ANSI/CAN 372, and CSA Standard B483.1. Product is compliant to California Health and Safety Code 116875 (AB 1953-2006), California Proposition 65 and the Federal Safe Drinking Water Act.




REV. ECN: 6000 DHP
DATE: 08/16/23 CHK'D.

MODEL(S)

2000HS, BOTTLE FILLER


0510002225.D

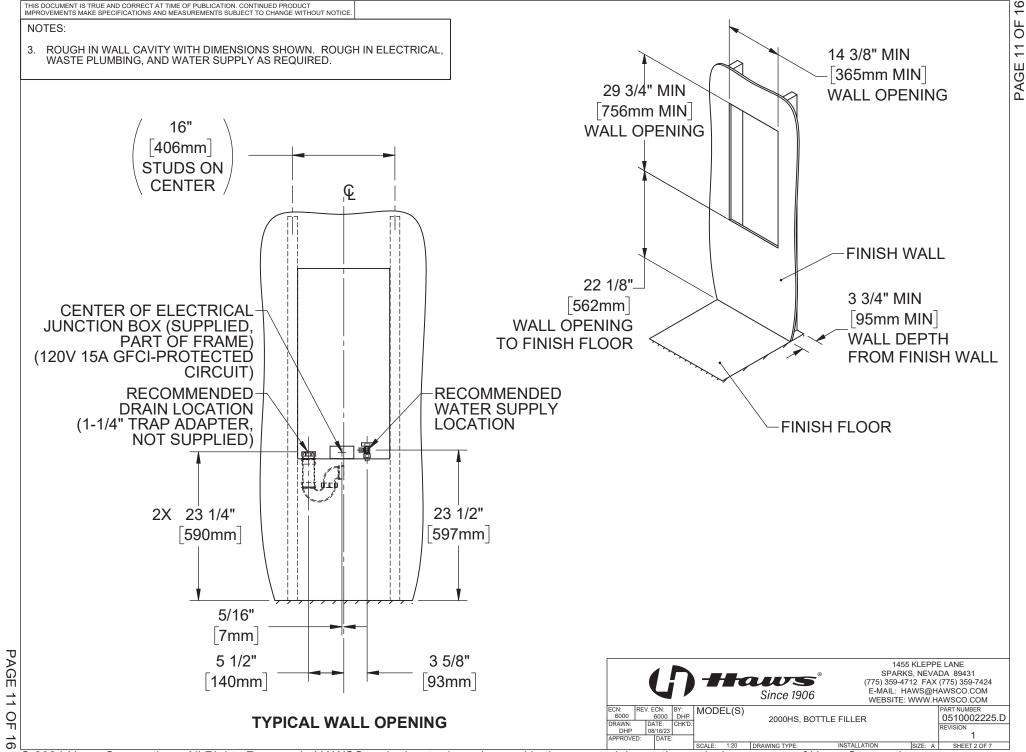

PAGE 12 OF

NOTES:

- 4. DISASSEMBLE BOTTLE FILLER ASSEMBLY AND LOWER PANEL FROM FRAME BY REMOVING 4X #8-32 PANEL SCREWS (T20 TORX).
- 5. REMOVE WATER FILTER AND SET ASIDE.
- 6. MOUNT FRAME ASSEMBLY INTO WALL CAVITY USING 6X 1/4" STRUCTURAL SCREWS (NOT SUPPLIED). USE SHIMS AS NEEDED AND ENSURE THE FRAME IS SQUARE.

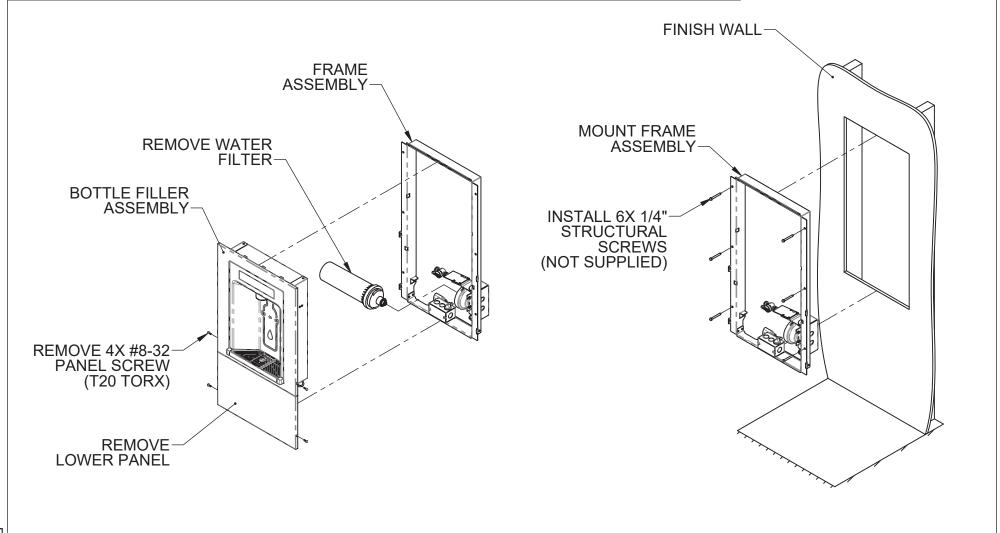

(DRAIN & WATER SUPPLY COMPONENTS HIDDEN FOR CLARITY)

G Haws
Since 1906

1455 KLEPPE LANE SPARKS, NEVADA 89431 (775) 359-4712 FAX (775) 359-7424 E-MAIL: HAWS@HAWSCO.COM WEBSITE: WWW.HAWSCO.COM


ECN: REV. ECN: BY: DHP OB/16/20. DATE: CHKD. DATE: DAT

2000HS, BOTTLE FILLER

PART NUMBER 0510002225.D REVISION 1

NOTES:

- 7. HANG BOTTLE FILLER ON TOP OF FRAME. INSTALL 2X #8-32 PANEL SCREWS (PREVIOUSLY REMOVED) ON EITHER SIDE OF THE BOTTLE FILLER PANEL.
- 8. CONNECT FILTER CABLE TO THE RFID FILTER TRACKING BOARD AND INSERT FILTER CABLE RETAINER INTO FILTER BRACKET (DETAIL B).
- 9. HAVE AN ELECTRICIAN CONNECT 120V AC (60HZ) 15-AMP GFCI-PROTECTED CIRCUIT TO THE RESPECTIVE LINE, NEUTRAL, AND GROUND CONNECTIONS INSIDE THE BOTTLE FILLER JUNCTION BOX VIA ONE OF THE AVAILABLE 1/2" KNOCKOUTS.




SPARKS, NEVADA 89431 (775) 359-4712 FAX (775) 359-7424 E-MAIL: HAWS@HAWSCO.COM

0510002225.D

Since 1906

2000HS, BOTTLE FILLER

MODEL(S)

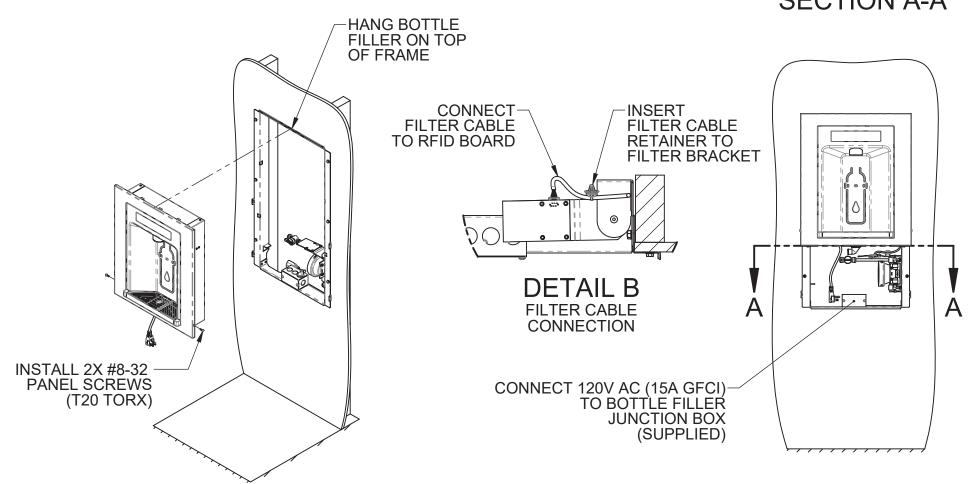


(DRAIN & WATER SUPPLY COMPONENTS HIDDEN FOR CLARITY)

NOTES:

- 10. ATTACH DRAIN HOSE TO DRAIN STACK USING SUPPLIED DRAIN HOSE ADAPTER AND HOSE CLAMP. ENSURE THAT DRAIN HOSE HAS A DOWNWARD SLOPE ALONG ITS FULL LENGTH.
- 11. ADHERE TO LOCAL, STATE, AND/OR FEDERAL CODES FOR PROPER DRAIN STACK AND TRAP INSTALLATION.

BOTTLE FILLER DRAIN ELBOW (PRE-INSTALLED)

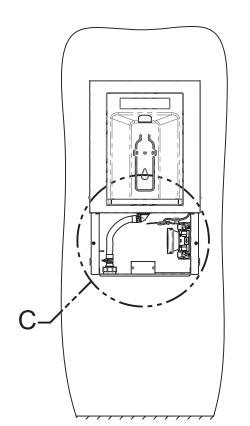

DRAIN HOSE
(SUPPLIED)


HOSE CLAMP
(SUPPLIED)

DRAIN HOSE ADAPTER
20mm to 1-1/4"
(SUPPLIED)

DRAIN STACK &
1-1/4" TRAP ADAPTER
(NOT SUPPLIED)

DETAIL C

(ELECTRICAL AND WATER SUPPLY COMPONENTS HIDDEN FOR CLARITY)



DRAIN HOSE ADAPTER INSTALLATION

ON

1-1/2" TRAP ADAPTER (NOT SUPPLIED)
1-1/2" X 1-1/4" SLIP JOINT WASHER (NOT SUPPLIED)
1-1/2" NUT (NOT SUPPLIED)



1455 KLEPPE LANE SPARKS, NEVADA 89431 (775) 359-4712 FAX (775) 359-7424 E-MAIL: HAWS@HAWSCO.COM WEBSITE: WWW.HAWSCO.COM

2000HS, BOTTLE FILLER

PART NUMBER
0510002225.D
REVISION
1

© 2024 Haws Corporation - All Rights Reserved. HAWS® and other trademarks used in these materials are the exclusive property of Haws Corporation.

NOTES:


PAGE

15

유

- 12. INSTALL 3/8" TUBING AS SHOWN. NOTE DIRECTION OF FLOW ARROWS ON FILTER.


 CUT ALL TUBING SQUARE AND CLEAN AS REQUIRED. ENSURE TUBING IS FULLY INSERTED INTO PUSH-TO-CONNECT FITTINGS.
- 13. CONNECT THE WATER SUPPLY LINE TO THE WATER SUPPLY STOP USING COMPRESSION NUT (INCLUDED WITH YOUR SUPPLY STOP), FOLLOWED BY THE PLASTIC FERRULE (SUPPLIED), AND THE BRASS TUBE SUPPORT (SUPPLIED). INSERT SUPPLY LINE INTO THE SUPPLY STOP UNTIL IT BOTTOMS OUT. THREAD THE NUT ONTO THE SUPPLY STOP UNTIL FINGER TIGHT. PUT A LINE ON THE NUT USING A MARKER. TIGHTEN EXACTLY ONE ADDITIONAL FULL TURN (360 DEG) WITH A WRENCH, USING THE LINE TO COUNT TURNS. *NOTE THE CORRECT ORIENTATION OF THE PLASTIC FERRULE. *DO NOT USE THE BRASS FERRULE INCLUDED WITH YOUR SUPPLY VALVE.

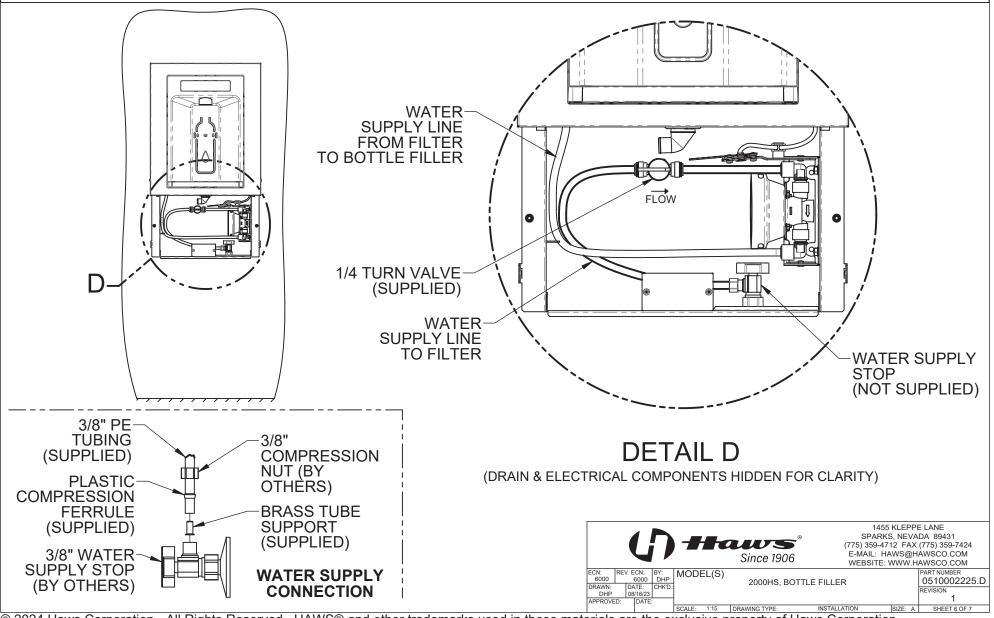

PAGE 16 OF

- 14. INSTALL WATER FILTER AND TURN ON WATER SUPPLY.
- 15. CHECK ALL FITTINGS FOR LEAKS AND ENSURE DRAIN FITTINGS ARE TIGHT.
- 16. CONNECT BOTTLE FILLER POWER CORD PLUG TO JUNCTION BOX POWER CORD RECEPTACLE.
- 17. INSTALL LOWER PANEL USING 2X #8-32 PANEL SCREWS (PREVIOUSLY REMOVED).
- 18. INSTALLATION COMPLETE.

NOTES:

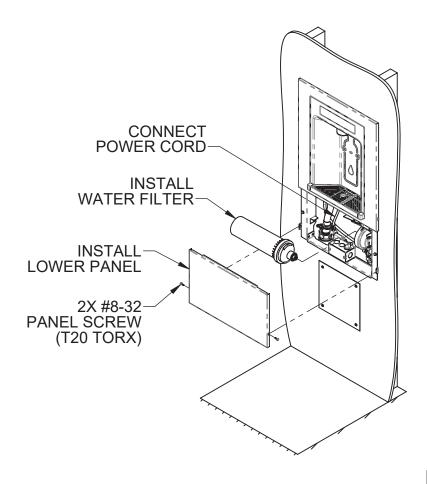



1455 KLEPPE LANE SPARKS, NEVADA 89431 (775) 359-4712 FAX (775) 359-7424 E-MAIL: HAWS@HAWSCO.COM WEBSITE: WWW.HAWSCO.COM

2000HS, BOTTLE FILLER

PART NUMBER 0510002225.D REVISION 1