

**WF3000 PFAS WATER FILTER**  
3000-GALLON CAPACITY / TWO STAGE  
NSF/ANSI/Lead/Bacteria/Chlorine/Microplastics

**STANDARD FEATURES**

**3rd Party Certified For The Following:**

- NSF/ANSI 53 for Cyst and Total PFAS Reduction Including: PFOA, PFOS, PFHpA, PFHxS, PFNA \*\*
  - NSF/ANSI 42+53 for Lead Reduction
  - NSF/ANSI 42 for Chlorine Taste, Odor and Particulate Class 1
  - NSF/ANSI 401 for Reduction of Microplastics
  - ASTM F838-20 for Bacteria Removal to 0.1 Micron (99.9%)
- (\*\* Meets EPA requirements when supply water is less than 390 PPT)

**Additional Filter Features:**

- Retrofits Existing WF1 and WF1EZ - EZ Door<sup>®</sup> Filter \*\*\*
- Two Stage Hollow Core Fiber & Carbon Block Technology Provides Superior Filtration versus Single Stage Designs
- Easy 1/4 Turn Filter Head with Auto-Shut Off
- Filter Head Assembly with Quick Connect Inlet and Outlet
- Maximum Flow Rate of 1.25 GPM

**SUGGESTED SPECIFICATIONS**

Provide model WF3000 Two Stage PFAS Water Filter Assembly with Hollow Core Fiber and Carbon Block Technology intended for use with Murdock<sup>®</sup> Drinking Fountains, Water Coolers and Bottle Fillers. Filter Head shall include Quick Connect Quarter-turn Couplers with auto-shut off feature for easy replacement. Third Party Filter certifications shall include compliance to ASTM F838-20 and NSF/ANSI 42+53 with reduction to 0.1 micron of sediment, chlorine, bacteria (cyst), and lead. Provide total PFAS reduction including PFOA, PFOS, PFHpA, PFHxS, and PFNA. Certifications shall provide compliance with NSF/ANSI 401 for reduction of Microplastics. Life span capacity shall be 3000 gallons or one year (whichever occurs first) with a maximum flow rate of 1.25 GPM [1.9 lpm]. The Filter shall be intended for cold water use only. Provide universal Mounting Bracket. Installation shall be in compliance with state and local laws and regulations.

**\*\*\*RETROFIT DETAILS:** WF3000 Filter is the same physical size as the WF1 (1500 Gallon) Filter however, uses a different Filter Head. Existing WF1 and WF1EZ Filters may be replaced with the WF3000 PFAS Filter and Filter Head Assembly. As a result, retrofit from WF1 Filter to WF3000 Filter will require replacement of both the Filter and the Filter Head. All other existing fittings and EZ Door<sup>®</sup> components remain the same.



Includes Filter, Filter Head, Universal Mounting Bracket

**MODEL:**

- WF3000 3000-Gallon PFAS Water Filter NSF/ANSI, PFAS, Lead, Bacteria, Chlorine, Microplastics




**3000 Gallon PFAS Filter Certifications**

- Tested to temperatures of 35°F - 130°F [2°C - 54°C]
- Operating pressure is not to exceed 105 PSIG (724 kPa)

**Note:** Declarations are based upon Third Party Certifications. Information is deemed reliable however, subject to change without notice.  
**Important:** Do not use where the microbiological condition of the water is deemed unsafe or of unknown quality. Provide adequate disinfection before or after the unit.

**⚠ WARNING:** Cancer and Reproductive Harm - www.P65Warnings.ca.gov

**Wf3000 PFAS WATER FILTER**  
3000-GALLON CAPACITY / TWO STAGE  
NSF/ANSI/Lead/Bacteria/Chlorine/Microplastics

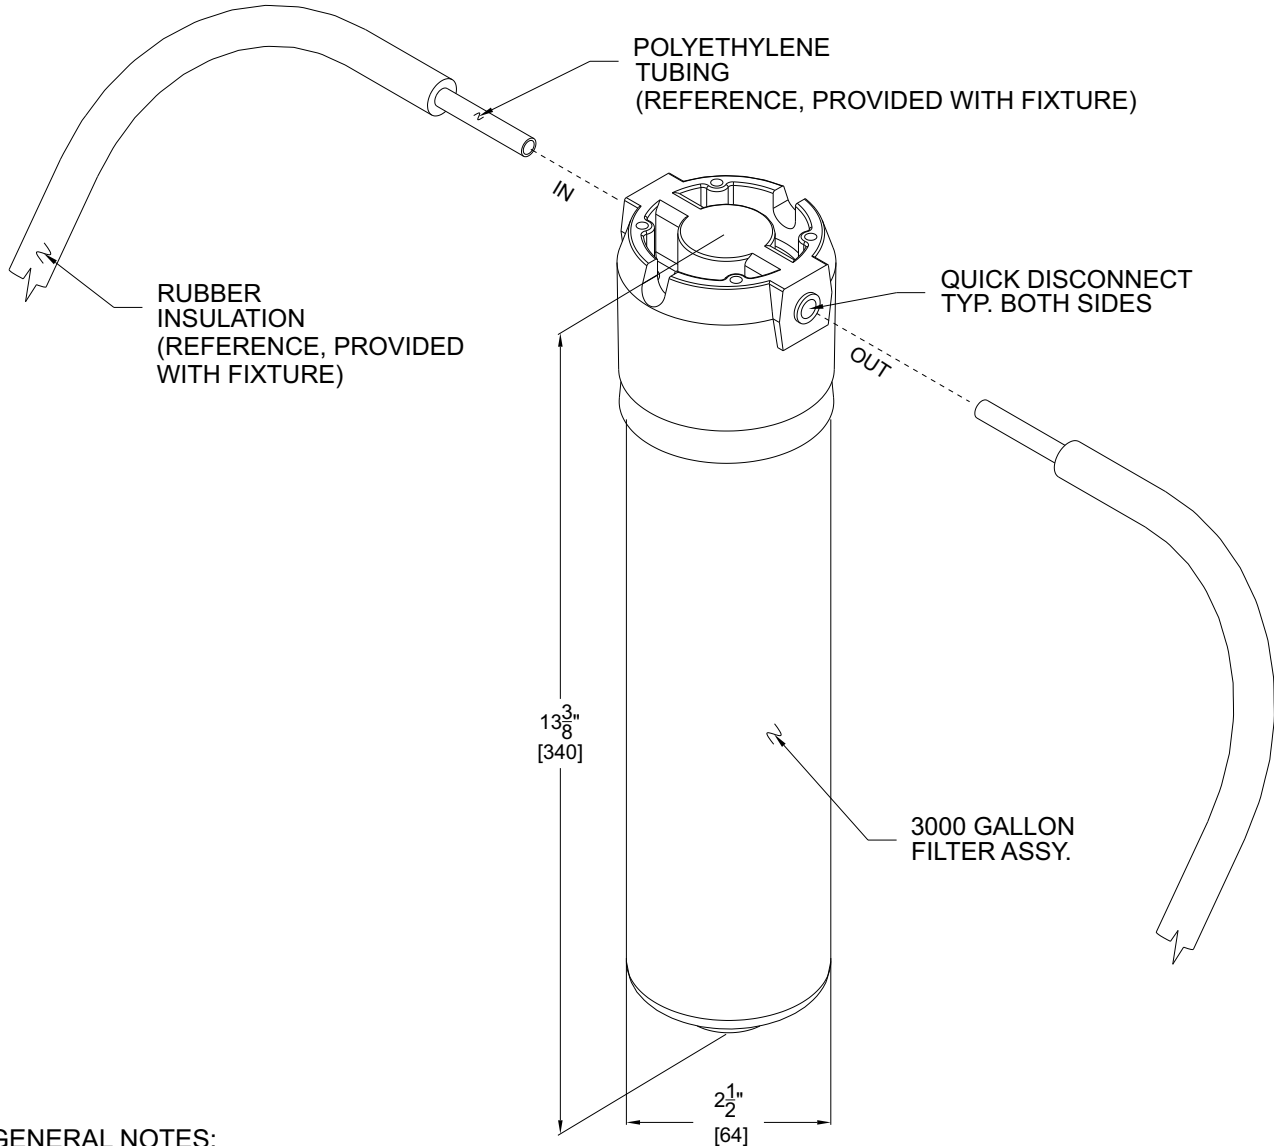

**GENERAL NOTES:**

1. MOUNTING HARDWARE VARIES BY PRODUCT.
2. CERTAIN ITEMS SHOWN ARE SUPPLIED WITH FOUNTAIN / BOTTLE FILLER PRODUCT.
3. ALL DIMENSIONS ARE IN INCHES [MM].

<b>SELECTION SUMMARY &amp; APPROVAL FOR MANUFACTURING</b>	Model Number & Options _____	Quantity _____	<i>All dimensions are subject to manufactures tolerance of plus or minus 1/4" nominal and subject to change without notice. Murdock® assumes no responsibility for use of void or superseded data. Dimensions may change with the addition of optional accessories. Murdock® Mfg., Member of Morris Group International®. Please visit <a href="http://www.murdockmfg.com">www.murdockmfg.com</a> for most current specifications.</i>
	Company _____		
	Contact _____	Title _____	
	Signature (Approval for Manufacturing) _____	Date _____	