



# Technical Sheet

## Modular Hands-Free QUASAR™ VersaFiller

- MWEBQ
- MW8EBQ
- MW12EBQ

### Suggested Specification

Model MW8EBQ shall deliver 8.0 gph of 50° F degree water at 90°F ambient and 80°F inlet water per ASHRAE 18 testing. Model MW12EBQ shall deliver 12.0 gph of 50° F degree water at 90°F ambient and 80°F inlet water per ASHRAE 18 testing. Model MWEBQ is a non-refrigerated unit. Unit shall have filter monitor and bottle counter. Shall be recessed in design.

QUASAR bottle filler shall have UVC-LED treatment at the dispense point, which disinfects the water while it is being dispensed. UVC-LED also cycles on periodically to keep the dispense point sanitized between dispenses.

Hands-free bottle filler components contain Freshield®, which utilizes a silver-based antimicrobial compound to protect the surfaces from discoloration, odors and degradation caused by the growth of microorganisms and mildew. Cabinet finish shall be brushed stainless steel. Shall use R-134a refrigerant. Shall comply with ANSI 117.1 and ADA. Shall be listed by Underwriters Laboratories to US and Canadian standards. Shall comply with NSF/ANSI 61 and NSF/ANSI 372.

### Models

MW8EBQ delivers 8.0 gph of chilled drinking water.  
MW12EBQ delivers 12.0 gph of chilled drinking water.  
MWEBQ is a non-refrigerated unit.

### Standard Features

- Hands-free QUASAR with mercury-free UVC-LED treatment at the dispense point
- Built-in 100 micron strainer stops particles before they enter the waterway
- Waterways are Lead-Free in materials & construction
- Hands-free bottle filler with 20 second shut off, integrated bottle counter and filter monitor
- Heavy duty steel frame
- High efficiency cooling system
- Built in panel locks for easy access to chiller and filtration

### Finishes

- Standard cabinet finish: Stainless steel

### Installation

- Prior to roughing consult with local, state and federal codes for proper mounting height
- Shipped with complete instructions
- Recessed mounting frame included, but water supply and drain required

### Options

- VersaFilter II (041110-001)
- Remedi Filter



### Limited 5-Year Warranty

(Continental limits of the United States and Canada)  
Five years on the sealed refrigeration system and most component parts. Detailed warranty certificate enclosed with each water cooler; sample available upon request.

### Export Warranty

One year on components parts. Detailed warranty certificate enclosed with each drinking fountain; sample copy available upon request.

### Certifications/Compliance

- Certified to UL 399 and CAN/CSA C22.2 No.120 (electric water coolers only)
- Product Certified to NSF/ANSI Standard 61-G & 372 and conforms with the lead content requirements for "Lead Free" plumbing as defined by California, Vermont, Maryland, and Louisiana state laws and the U.S. Safe Drinking Water Act
- These water coolers comply with the requirements of ADA (Americans with Disabilities Act) when properly installed



**WARNING:**  
Cancer and Reproductive Harm  
[www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)




Model	50° F Drinking Water 90° F Ambient Air Temp*			Hot'N Cold™ Model	115 Volts, 60 HZ			Glass Filler Acc. Option	Cabinet Color Finish	Net Wt. Approx.
	Rated Capacity GPH	Base Rate GPH	Pre-Cooler		Compr. HP	Full Load Amps	Rated Watts			
MW8EBQ	8.0	8.0	No	No	1/4	4.8	500	No	No	83 Lbs
MW12EBQ	12.0	12.0	No	No	1/3	5.5	550	No	No	85 Lbs
MWEBQ	Electric Bottle Filler Rating Only					.40	25	No	No	31 Lbs

\*Industry standard rating condition 80° F inlet water temperature


Specifications subject to change without notice

# Universal Bi-Level Modular with Hands-Free QUASAR™ VersaFiller

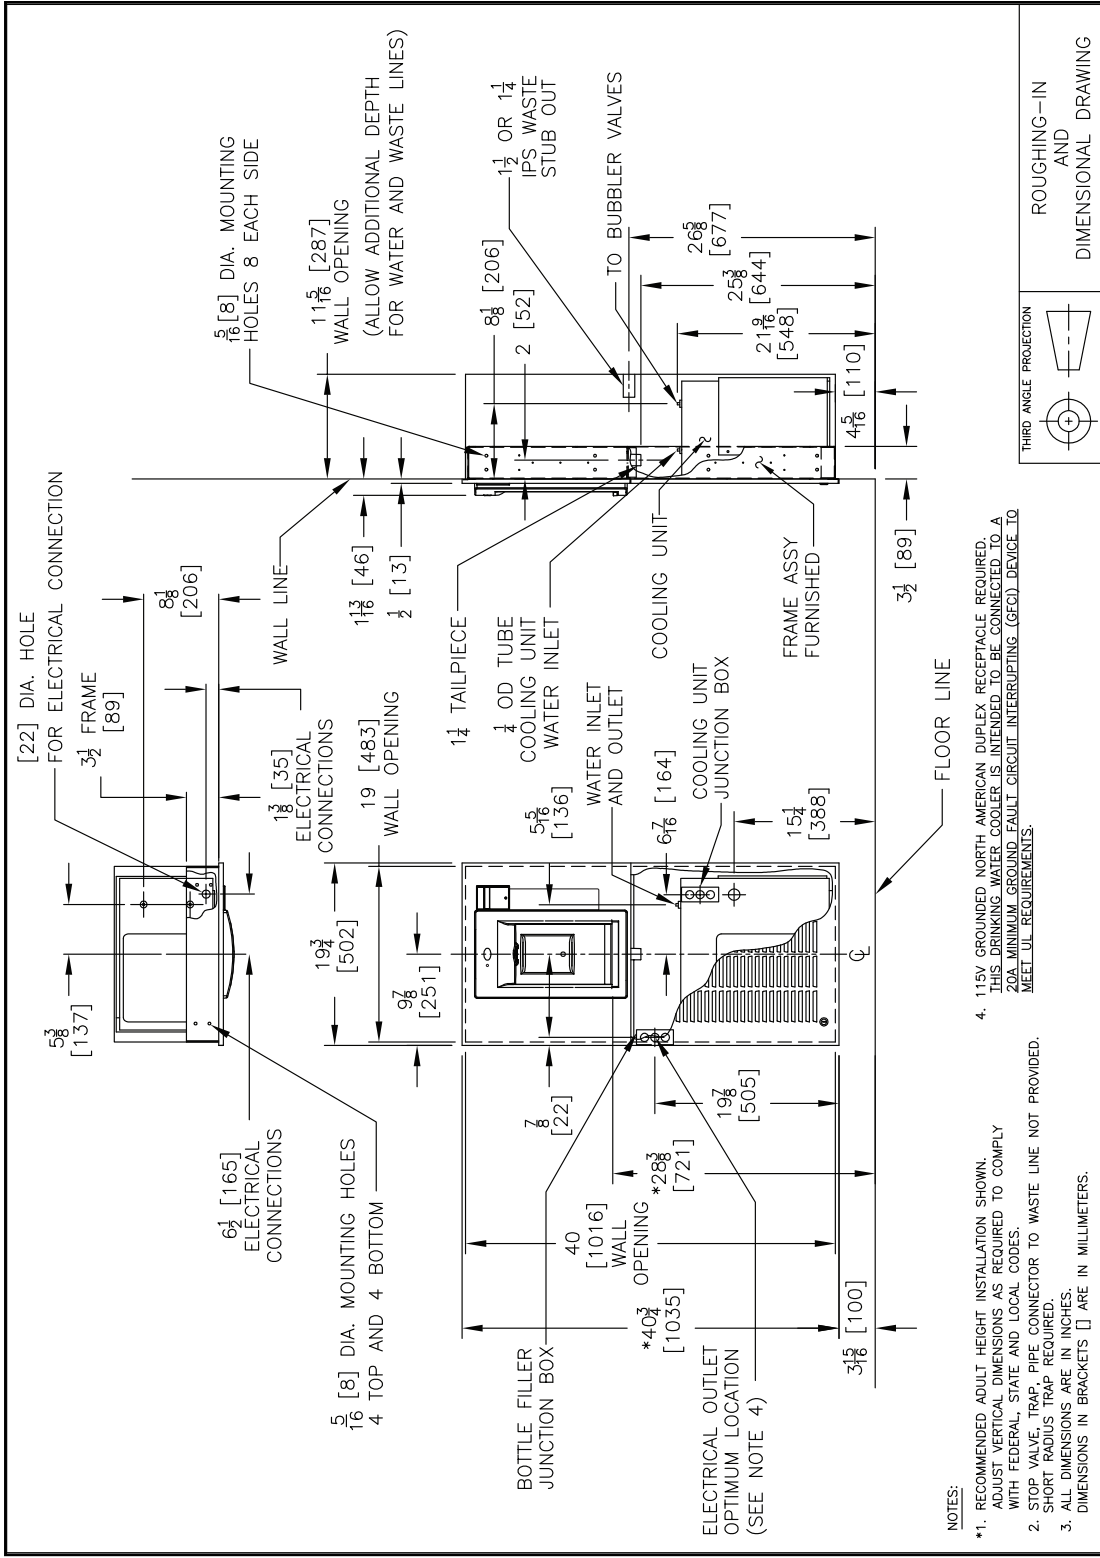

**NOTES:**

- \*1. RECOMMENDED ADULT HEIGHT INSTALLATION SHOWN. ADJUST VERTICAL DIMENSIONS AS REQUIRED TO COMPLY WITH FEDERAL, STATE AND LOCAL CODES.
- 2. STOP VALVE, TRAP, PIPE CONNECTOR TO WASTE LINE NOT PROVIDED.
- 3. ALL DIMENSIONS ARE IN INCHES. DIMENSIONS IN BRACKETS [ ] ARE IN MILLIMETERS.
- 4. 115V GROUNDED NORTH AMERICAN DUPLEX RECEPTACLE REQUIRED. THIS DRINKING WATER COOLER IS INTENDED TO BE CONNECTED TO A 20A MINIMUM GROUND FAULT INTERRUPTING (GFCI) DEVICE TO MEET UL REQUIREMENTS.



ROUGHING-IN AND DIMENSIONAL DRAWING



**OASIS INTERNATIONAL**  
 www.oasiscoolers.com  
 222 East Campus View Blvd.  
 Columbus, OH 43235  
 1-800-646-2747

OASIS is a registered trademark of LVD Acquisition, LLC dba Oasis International, © 2019 LVD Acquisition AS0041-F-1912