



We Know Water.

WALL-MOUNTED REFRIGERATED BOTTLE FILLER WITH VERSAFILTER™ III

• PGN8FEBF

Suggested Specification

Model PGN8FEBF shall deliver 8.0 gph of 50°F water at 90°F ambient and 80°F inlet water per ASHRAE 18 testing. Electronic bottle filler shall include contactless activation and laminar flow. Model PGN8FEBF shall be surface mount in design. Bottle Filler alcove and cabinet finish shall be stainless steel. Key VersaFilter components contain Freshield®, which utilizes a silver-based antimicrobial compound to protect the surfaces from discoloration, odors and degradation caused by the growth of micro-organisms and mildew. Shall be surface mount bottle filler in design with chilling capacity. Shall use R-134a refrigerant. Shall comply with ANSI 117.1 and ADA. Shall be listed by Underwriters Laboratories to US and Canadian standards, and comply with NSF/ANSI 61 and NSF/ANSI 372.



- Built-in 100 micron strainer stops particles before they enter the waterway
 - Waterways are lead-free in materials & construction
 - High efficiency cooling system
 - Stainless steel with heavy duty galvanized steel frame
 - Contactless activation bottle filler with programmable auto shut off
- Features:**
- Access through the side of the bottle filler cabinet for clean and easy replacement of filters
 - VersaFilter III located in top bottle filler for easy filter replacement
 - Built-in filter monitor and bottle counter
 - Logos permanently formed into the alcove and stainless steel wrapper
 - LED lighted alcove
 - Surface mount frame assembly

Filtration:	VersaFilter III is Certified to NSF/ANSI 42 and 53 for lead, cyst, Particulate Class I, chlorine, taste and odor reduction to 4,750 gallons
Power:	115 Volts, 60 Hz
Activation By:	Contactless Sensor
Mounting Type:	Wall Mounted
Chilling Option:	8.0 gph*
Full Load Amps:	5.0 amps
Rated Watts:	500
Approx. Net Weight:	72 lbs
Installation Location:	Indoor

Installation

- Prior to roughing in, consult with local, state and federal codes for proper mounting height
- Shipped with complete instructions and wall mounting bracket

Finishes

- Standard cabinet finish

Limited 5-Year Warranty

(Continental limits of the United States and Canada) Five years on the sealed refrigeration system and most component parts. Detailed warranty certificate enclosed with each bottle filler; sample available upon request.

Export Warranty

One year on component parts. Detailed warranty certificate enclosed with each bottle filler; sample copy available upon request.

Compliance

- Certified to UL 399 and CAN/CSA C22.2 No. 120
- Product Certified to NSF/ANSI Standard 61-G & 372 and conforms with the lead content requirements for "Lead Free" plumbing as defined by California, Vermont, Maryland, and Louisiana state laws and the U.S. Safe Drinking Water Act
- Complies with the requirements of ADA (Americans with Disabilities Act) when properly installed




WARNING:
Cancer and Reproductive Harm
www.P65Warnings.ca.gov



*Industry standard rating condition at 90°F ambient, 80°F inlet water and 50°F drinking water temperature

WALL MOUNTED REFRIGERATED BOTTLE FILLER WITH VERSAFILTER™ III

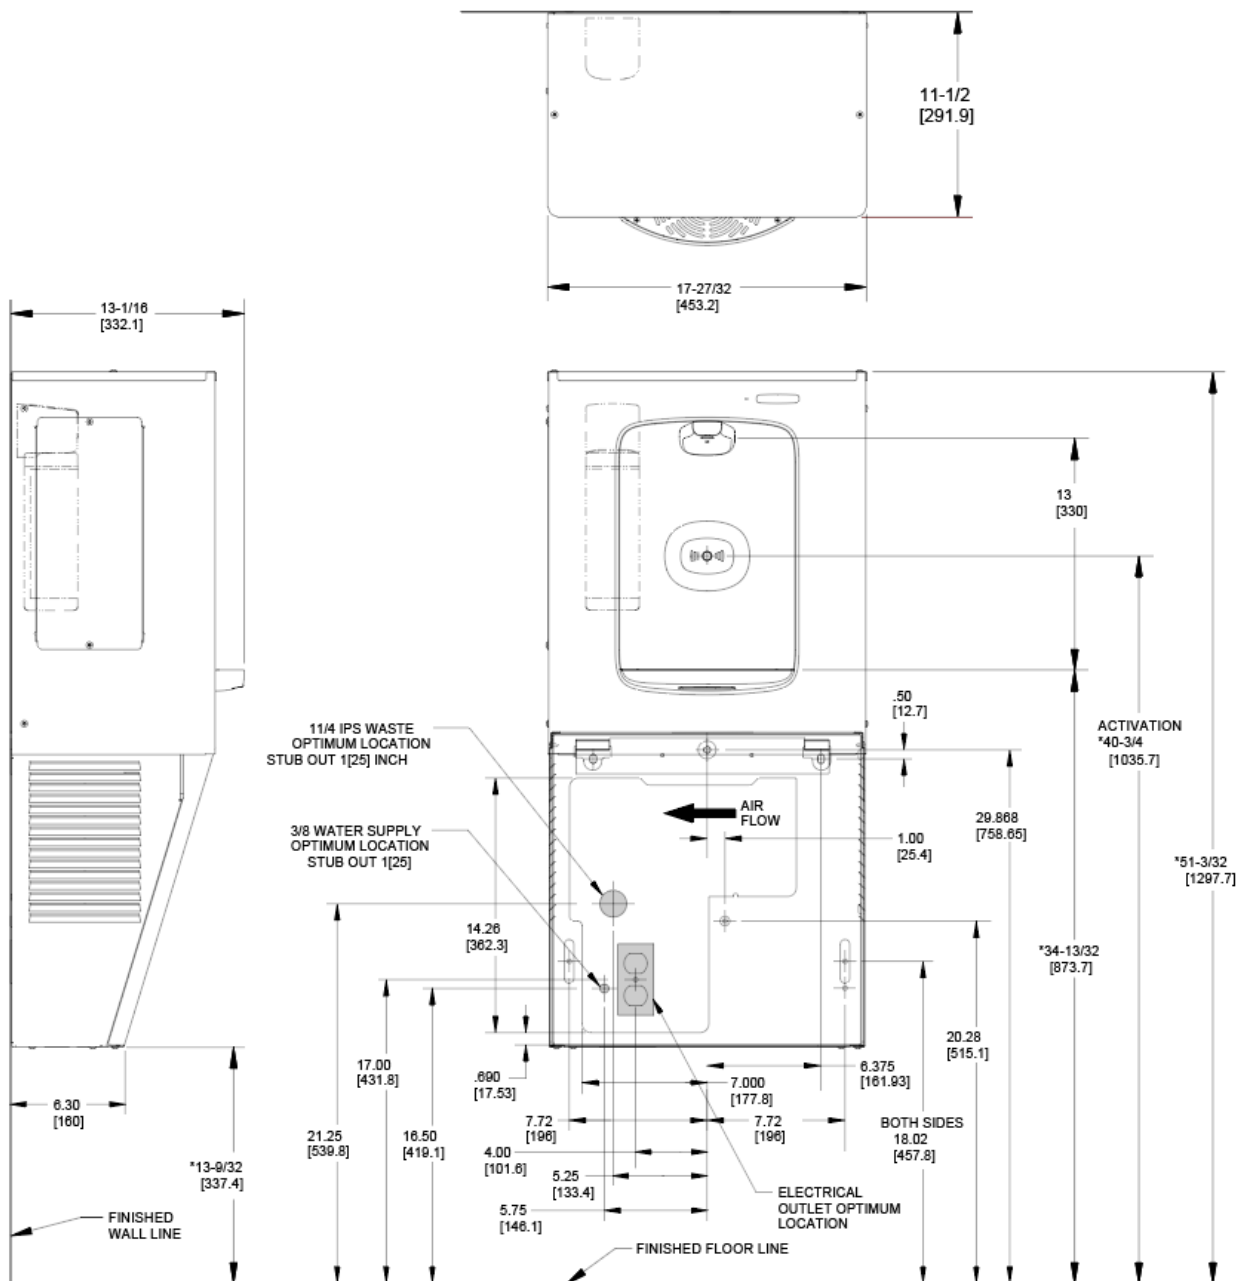

NOTES:

1. TRAP, STOP VALVE AND ELECTRICAL OUTLET NOT FURNISHED.
2. ALLOW 4 INCHES [102MM] MIN. PER SIDE FOR VENTILATION.
- * 3. RECOMMENDED ADULT BARRIER FREE HEIGHT INSTALLATION SHOWN. REDUCE HEIGHT BY 3 INCHES FOR INSTALLATIONS USED PRIMARILY BY CHILDREN AGES 12 AND YOUNGER. UNIT SHALL ALSO HAVE A MINIMUM CLEAR FLOOR SPACE 30[760] BY 48[1220]. ADJUST VERTICAL DIMENSIONS AS REQ'D TO COMPLY WITH FEDERAL, STATE, AND LOCAL CODES.
4. ALL DIMENSIONS ARE IN INCHES. DIMENSIONS IN BRACKETS [] ARE IN MILLIMETERS.