



Water Coolers

COMPACT ON-A-WALL

CSWD4, CSWDLR



Suggested Specification

Cabinet finish shall be Sandstone powder coat paint on galvanized steel or brushed stainless steel. Cooling system shall use R-134a refrigerant. Shall be listed by Underwriters' Laboratories to U.S. and Canadian standards and conform to European Union Directives.

Models

CSWD4 delivers 4.0 gph of chilled drinking water.

CSWDLR is a non-refrigerated fountain.

Standard Features

- > Waterways are Lead-Free in Materials & Construction
- > Dial-A-Drink® Bubbler
- > Stainless Steel Top
- > Welded Heavy-Gauge Steel Frame
- > High-Efficiency Cooling Tank and Coil
- > Refrigerant R-134a
- > Product Certified to NSF/ANSI Standard 61, Annex G (AB1953)
- > Limited 5-year Warranty

Finishes

- > Standard Cabinet Finish: Sandstone powder coated paint on Galvanized Steel.
- > Optional finishes at extra cost: Stainless Steel, Powder coated paint.



Components in this fountain are lead free as defined by the Safe Drinking Water Act Amendments of 1986, and the Lead Contamination Control Act of 1988.

Installation

- > Prior to roughing-in consult with local, state, and federal codes for proper mounting height.
- > Shipped with complete instructions and wall mounting bracket.
- > Removable panels provide easy access for installation.

Limited 5-Year Warranty (Continental limits of the United States and Canada): Five years on the sealed refrigeration system and most component parts. Detailed warranty certificate enclosed with each water cooler; sample available upon request.

Export Warranty: One year on sealed refrigeration system and most components parts. Four-year replacement contract on sealed refrigeration system. Detailed warranty certificate enclosed with each drinking fountain; sample copy available upon request.

Product Certified to NSF/ANSI Standard 61, Annex G (weighted average lead content of $\leq 0.25\%$) and is in compliance with California's Health & Safety Code Section 116875 (commonly known as AB1953).

Models covered by this specification complies with all known Plumbing Codes. Listed by Underwriters' Laboratories to U.S. and Canadian standards and conform to European Union Directives.



Certified to NSF/ANSI 61/Section 9


Model	50° F Drinking Water 90° F Ambient Air Temp*				115 Volts, 60 HZ			Glass Filler Acc. Option	Cabinet Color Finish	Net Wt. Approx.
	Rated Capacity GPH	Base Rate GPH	Pre-Cooler	Hot'N Cold™ Model**	Compr. HP	Full Load Amps	Rated Watts			
CSWD4**	4.0	2.5	Yes	No	1/8	3.5	400	No	Yes	51 Lbs.
CSWDLR	Fountain Only							No	Yes	24 Lbs.

*Industry Standard Rating Condition 80° F inlet water temperature.

**Special export models available, operable on 220-240 volts, 50/60 Hz.

Specifications subject to change without notice

OASIS® COMPACT ON-A-WALL WATER COOLER MODELS CSWD4, CSWDLR

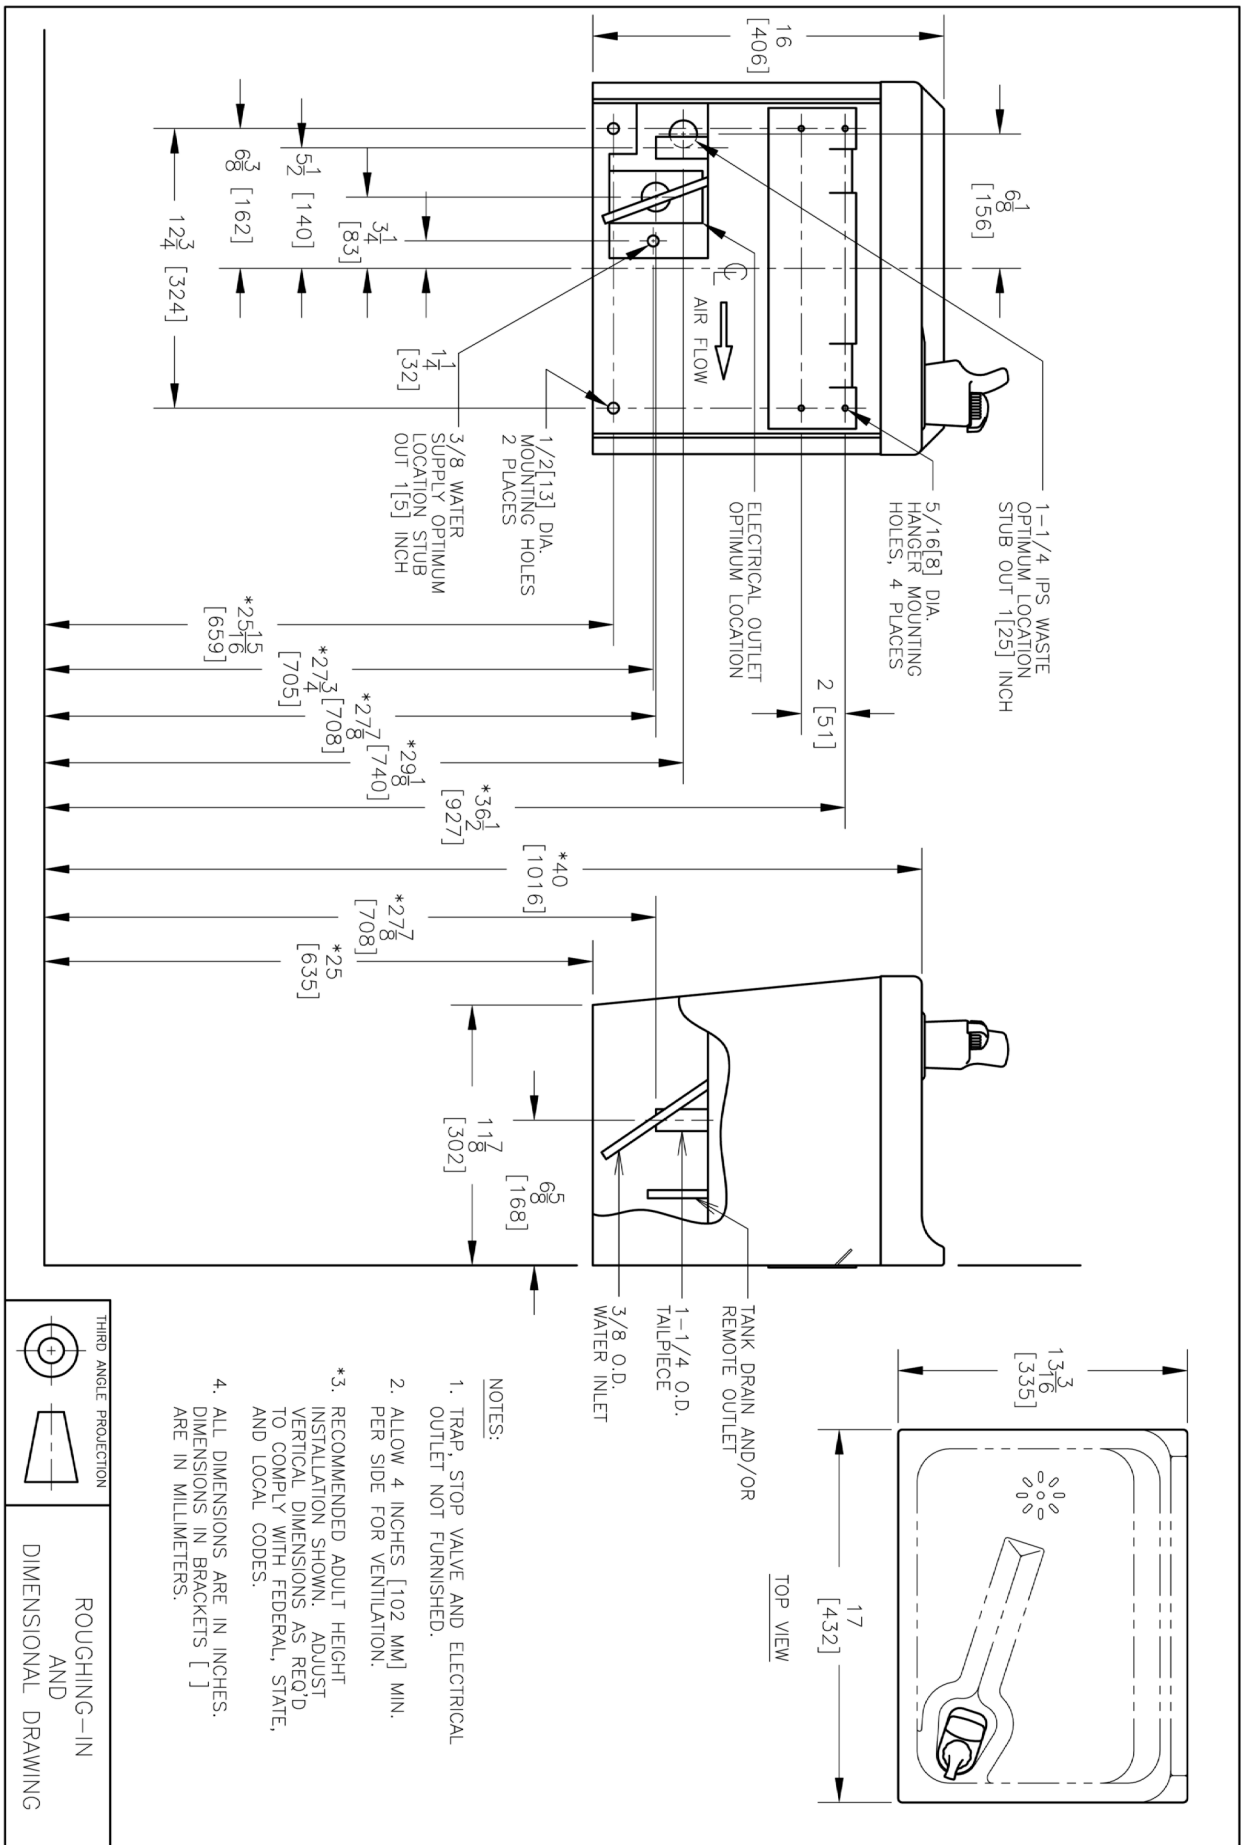

- NOTES:
1. TRAP, STOP VALVE AND ELECTRICAL OUTLET NOT FURNISHED.
 2. ALLOW 4 INCHES [102 MM] MIN. PER SIDE FOR VENTILATION.
 3. RECOMMENDED ADULT HEIGHT INSTALLATION SHOWN. ADJUST VERTICAL DIMENSIONS AS REQ'D TO COMPLY WITH FEDERAL, STATE, AND LOCAL CODES.
 4. ALL DIMENSIONS ARE IN INCHES. DIMENSIONS IN BRACKETS [] ARE IN MILLIMETERS.

THIRD ANGLE PROJECTION

ROUGHING-IN AND DIMENSIONAL DRAWING