model 5830HST



FEATURES & BENEFITS

OPTIONS


For more information, visit www.hawsco.com or call (888) 640-4297.



SPECIFICATIONS

5830HST handle and stem assembly is used with the 5830LF valve. Used on models from 2005 and newer.







NOTES:


IF NEEDED, WHEN RE-ASSEMBLING VALVE TIGHTEN DOWN ON (EXISTING) 3/8"-24 LOCK NUT USING A 9/16" BOX WRENCH AND A 5/32" ALLEN WRENCH (TO KEEP VALVE STEM (ITEM 14) FROM TURNING UNTIL ACHIEVING A SLIGHT PLAY ON HANDLE. CAUTION: DO NOT OVER-TIGHTEN NUT. VALVE WILL LEAK.

- 2 LUBRICATE WITH GREASE BEFORE ASSEMBLY.
- 3 SECURE CAP (ITEM 1) WITH SET SCREW (ITEM 19) USING A 1/16" ALLEN WRENCH.

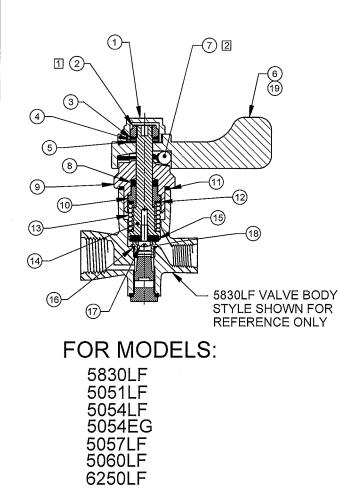

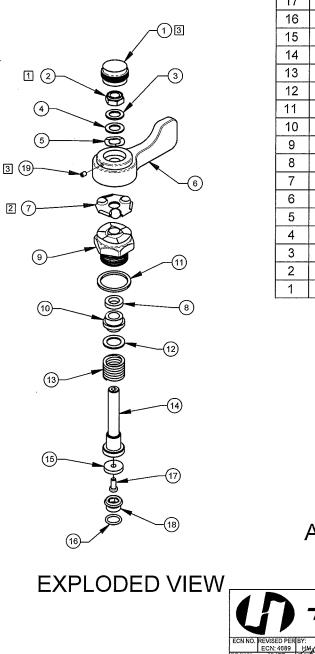

			-
ITEM	PART NO.	PART NUMBER	
19	0005063885	SCREW, SET 6-32 UNC]
18	0005208682	SEAT F/5830HST	
17	0005064870	SCREW, 8-32 X 3/8"	
16	0003981050	O-RING, .426 X .070 WALL	
15	0006634576	WASHER, .660 X .170 X .125	-
14	0005532750	STEM, VALVE	f
13	0005425392	SPRING, .73 X 1.25 X 2.50mm	μ
12	0006634380	WASHER, .75 X .494 X .040	AG
11	0006634184	WASHER, 1.165 X .951 X .073]@`
10	0002583484	GLAND]
 9	0000356123	BONNET, FAUCET]
8	0002582902	GLAND PACKING	
7	0000192993	BEARING SET]
6	0003221210	HANDLE, LEVER F5054LF]
5	0006626653	WASHER, WAVE 5/16"]
4	0006633792	WASHER, .650 X .380 X .040	
3	0006633596	WASHER, .625 X .390 X .048	
2	0003801119	NUT, 3/8-24 UNF NYLON LOCK	
1	0001464267	INDEX CAP]
1	0001464267		



5830HST

HANDLE/STEM ASSEMBLY

DRAWING TYPE:

INSTALLATION

MODEL(S)

SCALE

DRAWN:

RTM

APPROVED:

DATE:

1455 KLEPPE LANE

SPARKS, NEVADA 89431 (775) 359-4712 FAX (755) 359-7424

E-MAIL: HAWS@HAWSCO.COM WEBSITE: WWW.HAWSCO.COM

> PART NUMBER 0002080002

DRAWING NO

15246A00

REV

2

©2013 Haws Corporation - All Rights Reserved. HAWS[®] and other trademarks used in these materials are the exclusive property of Haws Corporation.