



We Know Water.

WALL-MOUNTED REFRIGERATED CONTACTLESS QUASAR™ VERSAFILLER® WITH VERSAFILTER™ III AND REMEDI FILTER

• PGN8F2EBQ

Suggested Specification

Model PGN8F2EBQ shall deliver 8.0 gph of 50°F water at 90°F ambient and 80°F inlet water per ASHRAE 18 testing. Electronic bottle filler shall include contactless activation and laminar flow. Shall be surface mount in design with chilling capacity Bottle Filler alcove and cabinet finish shall be stainless steel. Key VersaFiller components contain Freshield®, which utilizes a silver-based antimicrobial compound to protect the surfaces from discoloration, odors and degradation caused by the growth of micro-organisms and mildew. QUASAR bottle filler shall have UV-C LED treatment at the dispense point, which disinfects the water while it is being dispensed. UV-C LED also cycles on periodically to keep the dispense point sanitized between dispenses. Shall use R-134a refrigerant. Shall comply with ANSI 117.1 and ADA. Shall be listed by Underwriters Laboratories to US and Canadian standards, and comply with NSF/ANSI 61 and NSF/ANSI 372.



Features:	<ul style="list-style-type: none"> • Contactless QUASAR with mercury-free UV-C LED treatment at the dispense point • Built-in 100 micron strainer stops particles before they enter the waterway • Waterways are lead-free in materials & construction • High efficiency cooling system • Stainless steel with heavy duty galvanized steel frame • Contactless activation bottle filler with programmable auto shut off • Access through the side of the bottle filler cabinet for clean and easy replacement of filters • Built-in filter monitor and bottle counter • Logos permanently formed into the alcove and stainless steel wrapper • LED lighted alcove • Surface mount frame assembly
------------------	---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

Filtration:	VersaFilter III is Certified to NSF/ANSI 42 and 53 for lead, cyst, Particulate Class I, chlorine, taste and odor reduction to 4,750 gallons
--------------------	---------------------------------------------------------------------------------------------------------------------------------------------

Power:	115 Volts, 60 Hz
---------------	------------------

Activation By:	Contactless Sensor
-----------------------	--------------------

Mounting Type:	Wall Mounted
-----------------------	--------------

Chilling Option:	8.0 gph*
-------------------------	----------

Full Load Amps:	5.5 amps
------------------------	----------

Rated Watts:	550
---------------------	-----

Approx. Net Weight:	72 lbs
----------------------------	--------

Installation Location:	Indoor
-------------------------------	--------

Installation

- Prior to roughing in, consult with local, state and federal codes for proper mounting height
- Shipped with complete instructions and wall mounting bracket

Finishes

- Standard cabinet finish

Options

- OASIS VersaFilter III Replacement Cartridge 041145-001
- OASIS Remedi Replacement Cartridge 037406-101

Limited 5-Year Warranty

(Continental limits of the United States and Canada)
Five years on the sealed refrigeration system. Bottle fillers, fountains and electrical components are warranted for 12 months. Detailed warranty certificate enclosed with each bottle filler; sample available upon request.

Export Warranty

One year on component parts. Detailed warranty certificate enclosed with each bottle filler; sample copy available upon request.

Compliance

- Certified to UL 399 and CAN/CSA C22.2 No. 120
- Product Certified to NSF/ANSI Standard 61-G & 372 and conforms with the lead content requirements for "Lead Free" plumbing as defined by California, Vermont, Maryland, and Louisiana state laws and the U.S. Safe Drinking Water Act
- Complies with the requirements of ADA (Americans with Disabilities Act) when properly installed



WARNING:


Cancer and Reproductive Harm
www.P65Warnings.ca.gov



*Industry standard rating condition at 90°F ambient, 80°F inlet water and 50°F drinking water temperature

Specifications subject to change without notice

WALL-MOUNTED REFRIGERATED QUASAR™ BOTTLE FILLER WITH VERSAFILTER™ III AND REMEDI FILTER

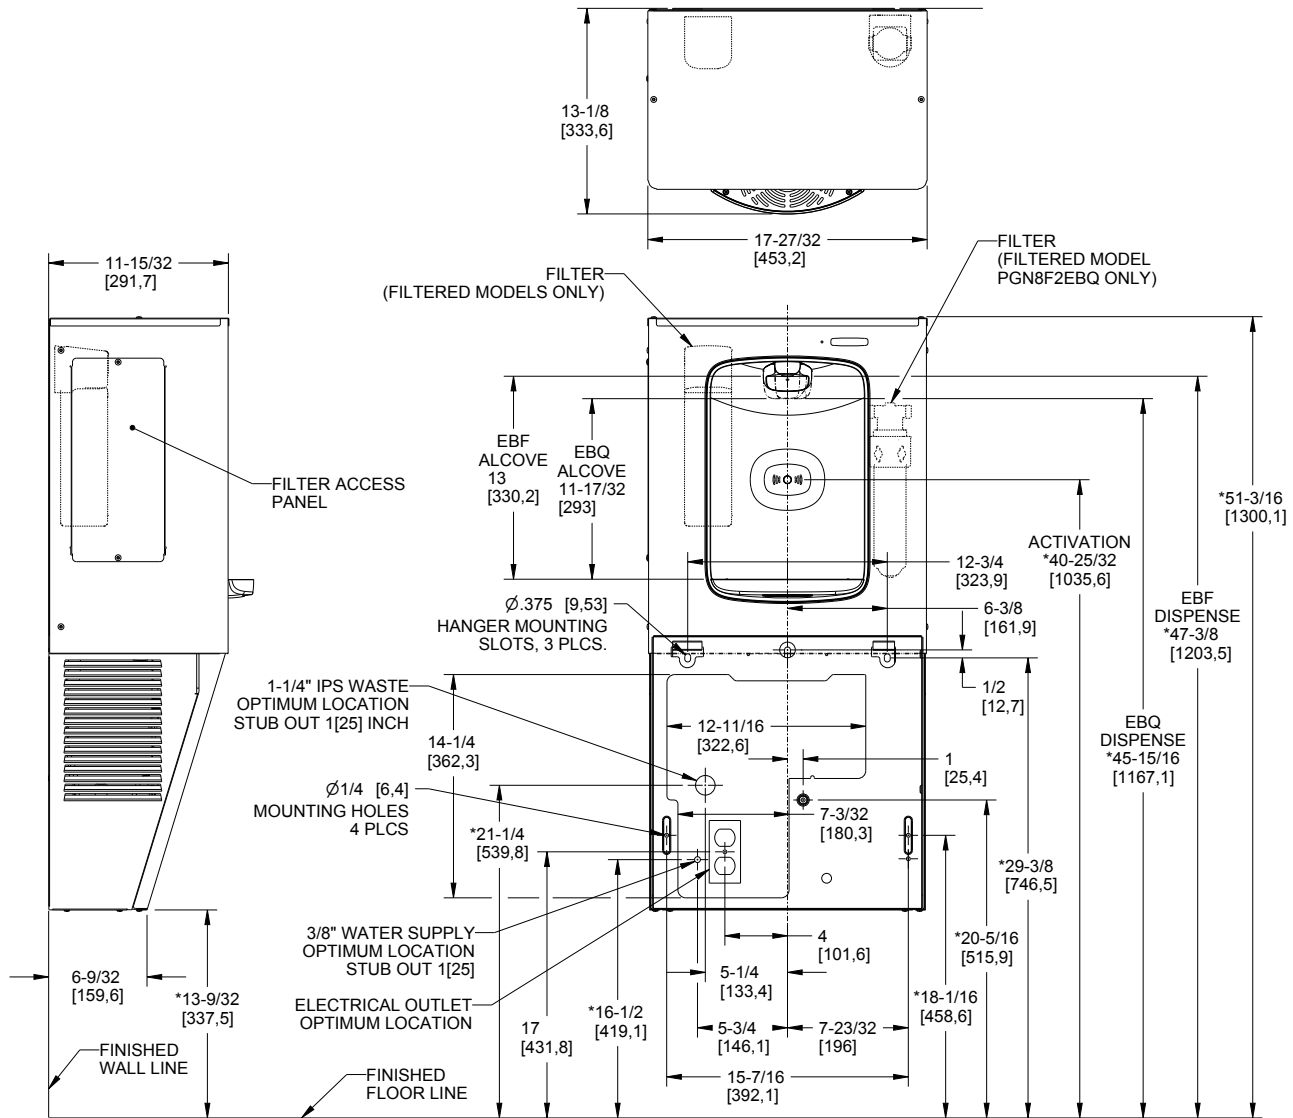

(REFRIGERATION COMPONENTS NOT SHOWN)

NOTES:

1. TRAP, STOP VALVE AND ELECTRICAL OUTLET NOT FURNISHED.
2. ALLOW 4 INCHES [120MM] MIN. PER SIDE FOR VENTILATION.
- *3. RECOMMENDED ADULT BARRIER FREE HEIGHT INSTALLATION SHOWN. REDUCE HEIGHT BY 3 INCHES FOR INSTALLATIONS USED PRIMARILY BY CHILDREN AGES 12 AND YOUNGER. UNIT SHALL ALSO HAVE A MINIMUM CLEAR FLOOR SPACE 30[760] BY 48[1220]. ADJUST VERTICAL DIMENSIONS AS REQ'D TO COMPLY WITH FEDERAL, STATE AND LOCAL CODES.
4. ALL DIMENSIONS ARE IN INCHES. DIMENSIONS IN BRACKETS [] ARE IN MILLIMETERS.